



Battery Handling and Precautions

Soldering

- Do not solder directly onto batteries. Always solder onto solder tag for connection.
- GP NiMH rechargeable button cells with tags can be flow-soldered in a charged state within 10 seconds.

Charging and Discharging

- Always charge batteries before first time application even though some of our batteries are delivered in a charged state.
- Parallel charging or connection is not recommended. Parallel charging will produce irregular charging currents. Please consult GP Batteries for more details.
- Never short-circuit or reverse polarity in application.
- Do not use different types of batteries in the same battery assembly.
- If the battery has been deep-discharged, a prolonged charging time is required to bring the battery back to full capacity.

Storage

- Always store batteries in a cool, dry place.
- After long storage, e.g. over a year, it is desirable to cycle (charge/discharge) the battery 3 times to restore full capacity.
- Do not mix batteries with metal objects during storage or transportation to avoid accidental short-circuit.
- Do not store large quantities of batteries in a densely packed condition when they are in a charged or partially charged state.

Battery Handling

- Do not incinerate or dismantle batteries. Cell components are corrosive and may be harmful to skin and eyes.
- Do not pull on battery lead wires or connector. Excessive force on the leads or connectors can damage the welding joints or other connections.

Easy Battery Removal

- Some countries have legislation requiring easy removal of batteries from the devices. When designing a product, consideration should be given to the use of a socket connector and an easy-to-open battery compartment.

Distributed by:

GP Batteries

WORLDWIDE HEADQUARTERS HONG KONG

GPI INTERNATIONAL LIMITED

8/F., Gold Peak Building, 30 Kwai Wing Road,
Kwai Chung, N.T., Hong Kong
Tel: (852) 2484 3333 Fax: (852) 2480 5912
E-mail address: gpii@goldpeak.com
Website: www.gpbatteries.com.hk

SALES & MARKETING BRANCH OFFICES

ASEAN
GP BATTERY MARKETING (SINGAPORE) PTE. LIMITED
97 Pioneer Road, Singapore 639579
Tel: (65) 6863 1534 Fax: (65) 6863 8669

MALAYSIA
GP BATTERY MARKETING (MALAYSIA) SDN. BHD.
Lot 8, Jalan Pemberita U1/49,
Temasya Industrial Park,
40150 Shah Alam, Selangor Darul Ehsan, Malaysia
Tel: (60) 3 5569 3499 Fax: (60) 3 5569 3498

THAILAND
GP BATTERY MARKETING (THAILAND) CO., LIMITED
3/F., V.H. Commercial Building,
23/1 Soi Ngamwongwan 9, Ngamwongwan Road,
Bangkhen, Muang, Nonthaburi 11000, Thailand
Tel: (66) 2 952 5323/4/5 Fax: (66) 2 952 5322

TAIWAN
GOLD PEAK INDUSTRIES (TAIWAN) LIMITED – TAIPEI OFFICE
Room 1200, International Trade Building, No.205 Sec.1,
Tun Hua South Road, Taipei 10647, Taiwan R.O.C.
Tel: (886) 2 2741 4919 Fax: (886) 2 2731 4868

CHINA
HUIZHOU CHAO BA BATTERY TECHNOLOGY CO., LTD
2/F., South of Hongye Industrial Building,
Tianluo Mountain, 14th Industrial District,
Huizhou City, Guangdong, China
(Postal Code: 516003)
Tel: (86) 752 282 8428 Fax: (86) 752 280 2872

HONG KONG
GP BATTERY MARKETING (H.K.) LIMITED
8/F., Gold Peak Building, 30 Kwai Wing Road,
Kwai Chung, N.T., Hong Kong
Tel: (852) 2420 0281 Fax: (852) 2494 9349

KOREA
GP BATTERY MARKETING (KOREA) LIMITED
4/F., Kunsul Hoekwan Building, 71-2 Non Hyun-Dong,
Kang Nam-Gu, Seoul, South Korea
Tel: (82) 2 549 7188/9 Fax: (82) 2 514 0623

U.S.A.
GOLD PEAK INDUSTRIES (NORTH AMERICA), INC.
11235 West Bernardo Court, San Diego,
CA 92127-1638, U.S.A.
Tel: (1) 858 674 6099 Fax: (1) 858 674 6496

CANADA
GP BATTERY MARKETING INC.
Unit 7, 7780 Woodbine Avenue, Markham,
Ontario, Canada L3R 2N7
Tel: (1) 905 474 9507 Fax: (1) 905 474 9452

LATIN AMERICA
GP BATTERY MARKETING (LATIN AMERICA) INC.
8370 NW, 66TH Street, Miami, Florida 33166, U.S.A.
Tel: (1) 305 471 7717 Fax: (1) 305 471 7718

EUROPE
GP BATTERY MARKETING (EUROPE) S.A.
75 Zae Du Trou Grillon,
91280 St Pierre Du Perray, Paris, France
Tel: (33) 1 6989 6200 Fax: (33) 1 6989 6221

GERMANY
GP BATTERY MARKETING (GERMANY) GMBH
Niedertriercker Str. 62, D-40667 Meerbusch, Germany
Tel: (49) 2132 971504/5/6 Fax: (49) 2132 80145

POLAND
GP BATTERY (POLAND) SPÓŁKA Z O.O.
ul. Słowicza 19, 02-170 Warszawa, Poland
Tel: (48) 22 868 0490 Fax: (48) 22 846 7535

U.K.
GP BATTERIES (U.K.) LIMITED
Summerfield Avenue, Chelston Business Park,
Wellington, Somerset, TA21 9JF, U.K.
Tel: (44) 1 823 660 044 Fax: (44) 1 823 665 595

ITALY
GP BATTERY MARKETING ITALY S.R.L.
Via A. Volta, 3 Assago-MI-Italy
Tel: (39) 02 488 2512 Fax: (39) 02 488 2865

SCANDINAVIA
GPBM NORDIC AB
Grimboäsen 5, 417 49 Gothenburg, Sweden
Tel: (46) 31 558 600 Fax: (46) 31 556 813

GPPA4RBH-A 02/04 All rights reserved. No parts of this catalogue written or pictorial may be reproduced without the permission of GPI International Ltd.

GP Batteries

NiMH Rechargeable Button Cells



NiMH Rechargeable Button Cells


Specifications

Model No.	Nominal Capacity at 5-hr rate (mAh)	Nominal Dimension (mm)		Weight (g)	Standard Charge			Nominal Voltage (V)	End Voltage (V)
		Diameter	Height		Current (mA)	Time (hour)	Maximum Charging Voltage (V)		
High Capacity Series									
GP2BNH ¹	2	6.95	1.75	0.31	0.2	16	1.5	1.2	1
GP15BNH ^{2**}	15	9.5	2.6	0.7	1.5	16	1.5	1.2	1
GP20BNH ^{2**}	20	11.5	2.25	1.0	2	16	1.5	1.2	1
GP25BNH ²	25	11.6	3.5	1.4	2.5	16	1.5	1.2	1
GP40BVH ^{2**}	40	11.6	5.5	1.9	4	16	1.5	1.2	1
GP80BVH ^{1**}	80	15.5	6.3	3.7	8	16	1.5	1.2	1
GP150BVH ¹	120	15.5	7.8	4.8	12	16	1.5	1.2	1
GP250BVH ²	250	25	6.4	10.9	25	16	1.5	1.2	1
GP320BVH ¹	320	25	8.7	14.1	32	16	1.5	1.2	1
Standard Series									
GP60BVH ¹	60	15.5	6.3	3.6	6	16	1.5	1.2	1
GP170BVH ¹	170	25	6.4	9.8	17	16	1.5	1.2	1
GP280BVH ¹	280	25	8.7	12.6	28	16	1.5	1.2	1

Typical Ambient Temperature : ¹ Standard Charge / Discharge : 0°C to 45°C / Storage : -20°C to 45°C
² Standard Charge : 0°C to 65°C / Discharge : -20°C to 65°C / Storage : -40°C to 65°C


** With UL approval.

Performance Characteristics

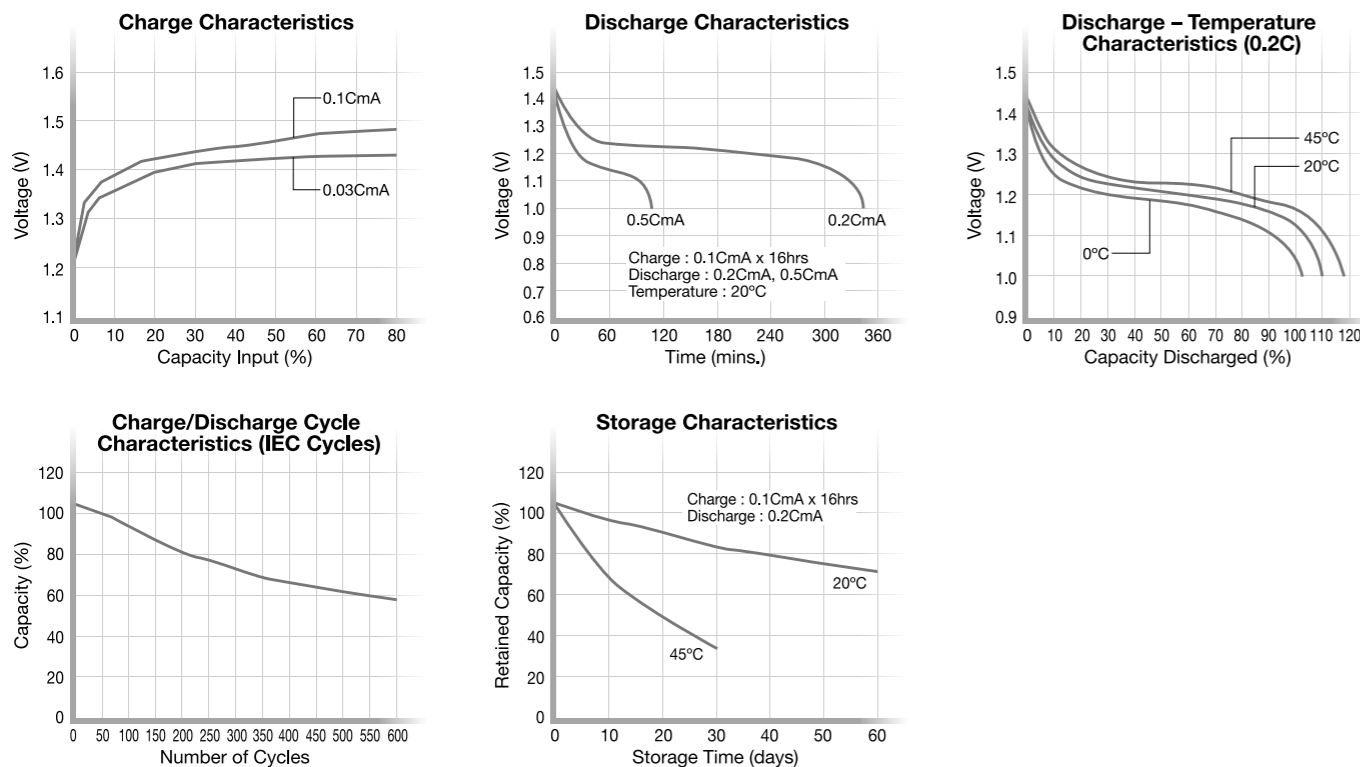

Configurations


Designation System for Battery Packs

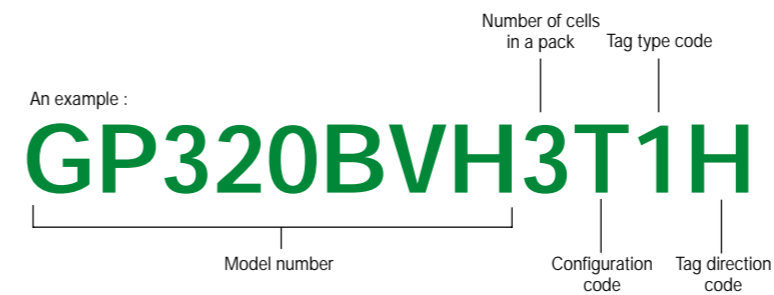


For battery packs with connectors, the last two characters will be used to specify connector type eg. GP320BVH3TMU.




Standard Configurations for Battery Packs

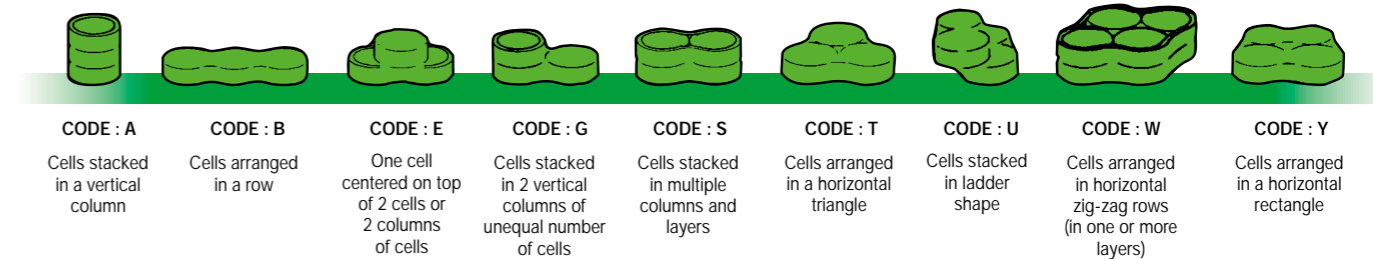

Tag Type Specifications

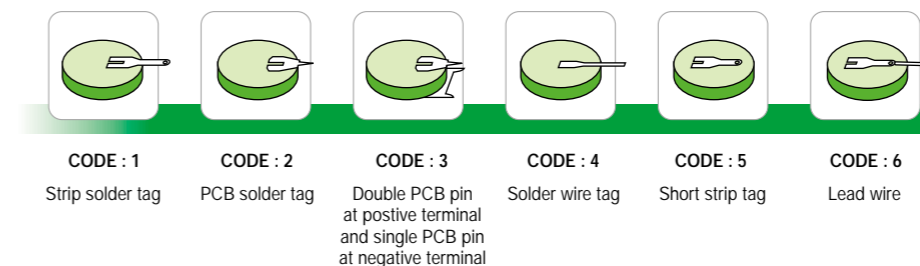

Tag Direction Codes

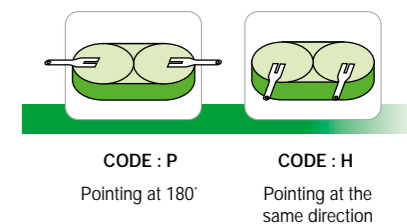


Connector Type Specifications

GP Universal Plug - exclusively from GP, offers distinctive features unparalleled in the market.
 - U.S. patent no. 5,161,990.

Major Benefits

- Compatible with most cordless phone models (interchangeable with Mitsumi, JST, Molex plugs etc.)
- Minimise inventory items
- User friendly

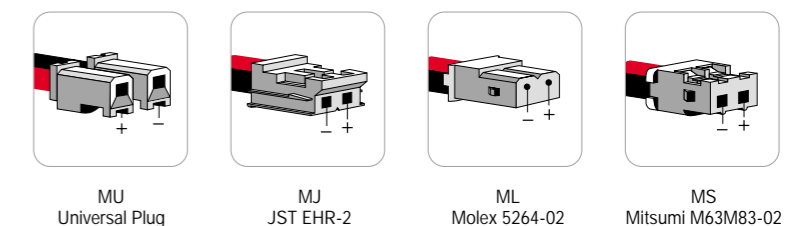

NiMH Rechargeable Button Cells

Memory Backup Applications

GP Batteries provide consistent and reliable performance for memory backup (MBU) and real time clock (RTC) application, Built-in PCB tags facilitate the subsequent processing and wave soldering.


Specifications

GP Model No.	No. of cells	Nominal Voltage (V)	Typical Capacity (mAh)	Nominal Capacity (mAh)	Length (mm)	Width (mm)	Height without pins (mm)	Tag Length (mm)	Weight (g)
MBU Series									
GP15BNH3A2H	3	3.6	16	15	9.8	10.3	10.3	4.5	2.3
GP20BNH3B2H	3	3.6	21	20	35.75	12.8	4.0	3.0	3.0
GP40BVH2A2H	2	2.4	48	40	11.7	12.5	12.5	4.5	4.2
GP40BVH3A2H	3	3.6	48	40	17.3	12.5	12.5	4.5	6.1
GP40BVH3B3H	3	3.6	48	40	36.0	12.5	7.0	3.5	6.1
GP80BVH2A2H	2	2.4	90	80	12.5	16.5	16.5	4.5	7.7
GP80BVH2B2H	2	2.4	90	80	31.5	11.5	7.0	4.5	7.7
GP80BVH3A3H	3	3.6	90	80	19.6	16.5	16.5	4.5	11.7
GP80BVH3B2H	3	3.6	90	80	43.0	11.5	7.0	4.5	11.7

* Different configurations and capacities are available upon request.

Major Applications

PC, VCR, desktop PC's, notebooks, PDA and car stereo etc

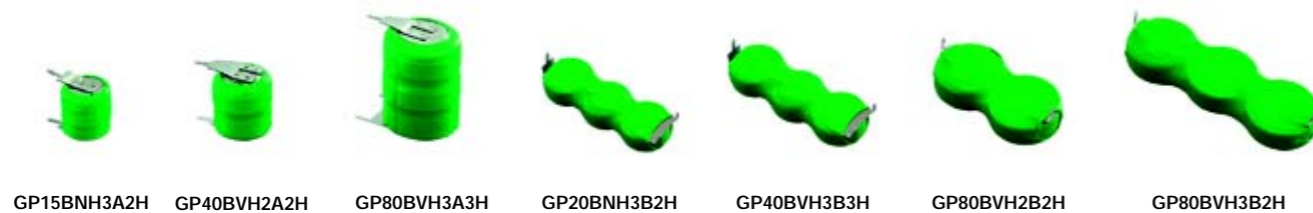

Bridging Applications

GP Batteries offer reliable and superior power backup for bridging purpose of mobile computers. It acts as an ultimate power supply temporarily during replacement of main battery. Batteries can be equipped with different connectors to suit specific requirement. The configuration of 6 cells together horizontally with connector is widely used in most portable power electronic devices.

Specifications

GP Model No.	No. of cells	Nominal Voltage (V)	Typical Capacity (mAh)	Nominal Capacity (mAh)	Length (mm)	Width (mm)	Height (mm)	Weight (g)	Wire Length (mm)
Bridging Series									
GP15BNH6BMX	6	7.2	16	15	59.0	13.0	3.4	4.9	35
GP20BNH6BMX	6	7.2	21	20	71.5	14.5	4.0	7.0	35
GP20BNH6SMX	6	7.2	21	20	36.7	14.5	7.0	7.0	20
GP40BVH6BMX	6	7.2	48	40	70.5	13.5	6.7	12.5	43
GP40BVH6WMX	6	7.2	48	40	42.5	22.5	7.5	12.5	60
GP80BVH6BMX	6	7.2	90	80	94.0	17.8	7.0	23.1	60
GP80BVH6SMX	6	7.2	90	80	48.0	18.5	13.2	24.0	60

* Different configurations and capacities are available upon request.

Major Applications

Notebooks, palmtops and PDA etc

